


MONITORS & ACCESSORIES

EOS JBC-22RS

Junction box with 2-port PoE switch · Code 8071103

Power and connect two PoE cameras over a single cable from your switch. The IP66 box protects the connections, outdoors too.

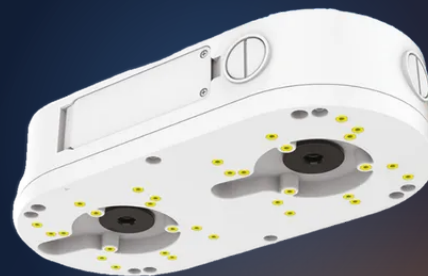

PoE

IP66

2

PoE outputs

30 W

total PoE power

IP66

protection

-30 °C

to +60 °C

KEY FEATURES

- Built-in PoE switch: 2 PoE outputs and 1 PoE input
- Two PoE cameras over one RJ45 cable
- IEEE 802.3af/at, up to 25 W per port, 30 W total
- IP66 enclosure for outdoor use
- Operates from -30 to +60 °C

SPECIFICATIONS

Ports & PoE

Ports	2× RJ45 PoE LAN (10/100 Mbps), 1× RJ45 PoE WAN (10/100 Mbps)
PoE standards	IEEE 802.3af / IEEE 802.3at
Max PoE power	25 W per port, up to 30 W total
Power supply	From a PoE switch (does not work with a PoE NVR)

Network

Network speed	100 Mbps (uplink & downlink)
Switching capacity	1 Gbps
Internal cache	768 Kbit

Build

Enclosure	PA66 + 30% glass fibre
Protection	IP66
Operating temperature	-30 to +60 °C